

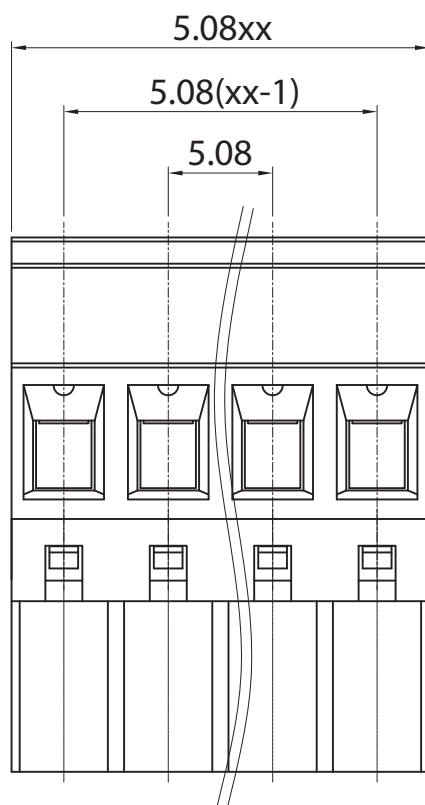


$S = 2:1$

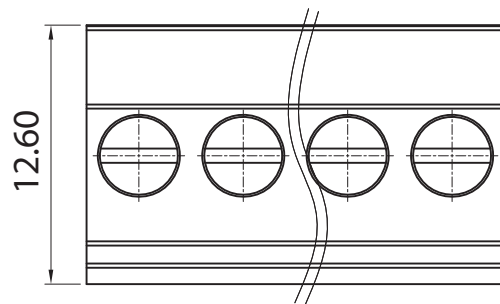

## Approvals

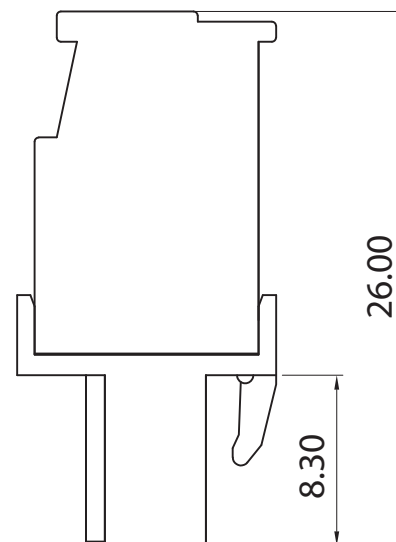

15A-300V

## Electrical

|                       |                              |
|-----------------------|------------------------------|
| Rated voltage         | 320V                         |
| Rated current         | 12A                          |
| Contact resistance    | 20mΩ                         |
| Insulation resistance | 500MΩ/DC500V                 |
| Withstanding voltage  | AC1600V/1min                 |
| Wire range            | 28-12 AWG 2,5mm <sup>2</sup> |

|                  |                  |
|------------------|------------------|
| Torque           | 0,5Nm (4.5Lb in) |
| Temp. Range      | -40°C +105°C     |
| Stripping length | 7 mm             |
| Max sold. time   |                  |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 5,08 mm |
| Poles | 2÷24    |

## Material

|            |                             |
|------------|-----------------------------|
| Housing    | PA66 UL94V0                 |
| Pin        |                             |
| Cage       | Copper Alloy, Ni plated     |
| Screws     | M3 steel, Zn plated         |
| Side Block |                             |
| Nut screw  |                             |
| Clamp      | Phosphore bronze, Ni plated |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CRV    | 02÷24    | -5.08 | -L      |       |        |

| Version | Date       |
|---------|------------|
| 01/21   | 29/11/2021 |



euro-block



| linear dimension (Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             |       |                | UNITS: mm          |
|--------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|--------------------|
| variable range                                         | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to        |
| tolerance                                              | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60               |
|                                                        |       |              |               |               |                |                 |             |       |                | SCALE: 10:1        |
|                                                        |       |              |               |               |                |                 |             |       |                | SHEET SIZE: ISO A4 |



First angle projection

**CRV-5.08-L**