

Approvals



15A - 300V
not approved

Electrical

Rated voltage 450V
Rated current 15A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC2000V/1min
Wire range 26-14 AWG 1,5mm²

Torque
Temp. Range -40°C +105°C
Stripping length 5 mm
Max sold. time +250°C for 5 sec.

Dimensions

Pitch 7,5 mm
Poles 2÷24

Material


Housing PA66 UL94V0
Pin Copper Alloy,Sn plated
Cage
Screws
Side Block
Nut screw
Clamp Stainless Steel

General description of ordering code



Series	n. Poles	Pitch	Version	Color	Custom
MRM6	2÷24	-7.5	-V		

Version Date

19/01 01/03/19

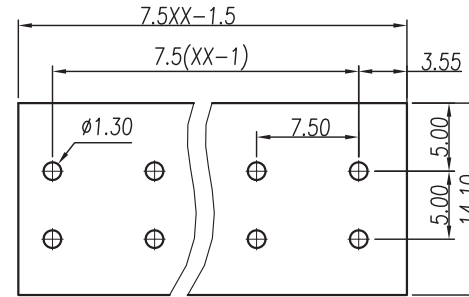

P.C.B. LAYOUT

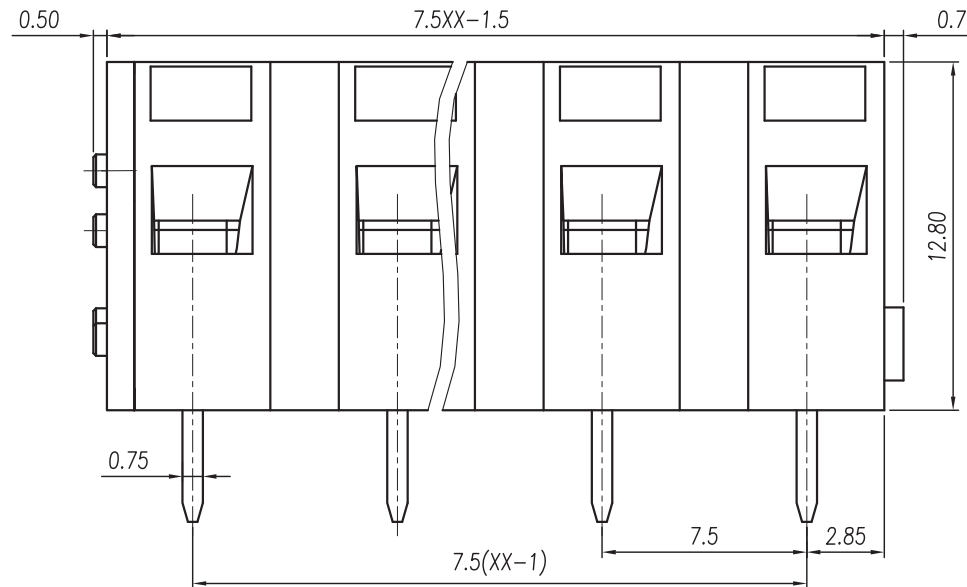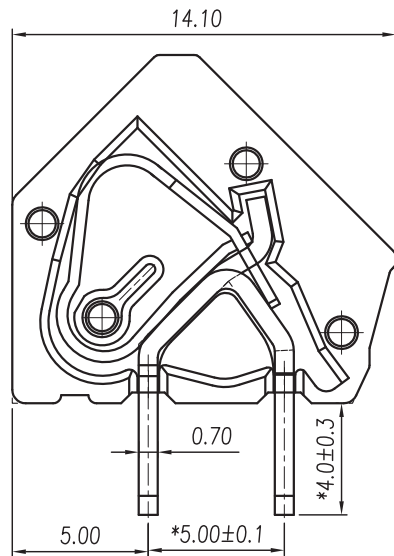

euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)										UNITS: mm			
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to	SCALE: 10:1		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	SHEET SIZE: ISO A4		



First angle projection

MRM6-7.5-V