

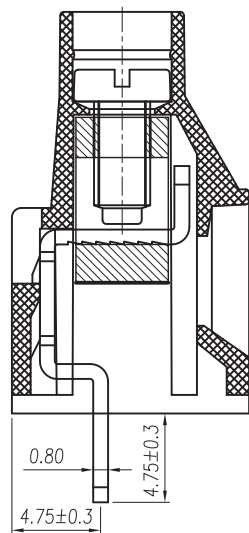


P.C.B. LAYOUT

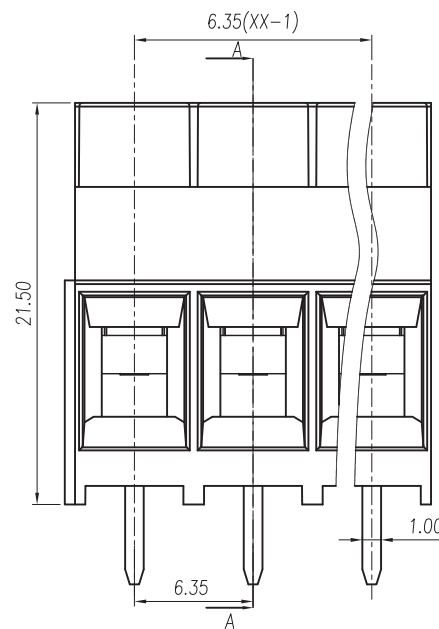

SECTION:A-A

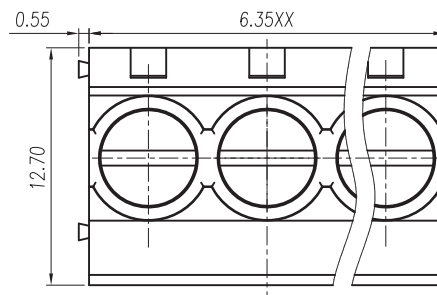

Approvals	
	30A-300V
	not approved

Electrical	
Rated voltage	400V
Rated current	32A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	26-10AWG 4mm ²
Torque	0,5Nm(4.4Lbin)
Temp. Range	-40°C+105°C
Stripping length	6mm
Max sold. time	+250°C for 5 sec

Dimensions	
Pitch	6,35mm
Poles	2÷24

Material	
Housing	PA66UL94V0
Pin	Copper Alloy, Sn plated
Cage	Copper Alloy, Ni plated
Screws	M3 Steel, Zn plated
Side Block	
Nut screw	
Clamp	

General description of ordering code					
Series	n. Poles	Pitch	Version	Color	Custom
MRS64	2÷24	-6.35	-V		

Version	Date
01/17	09/10/17



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

MRS64-6.35-V