
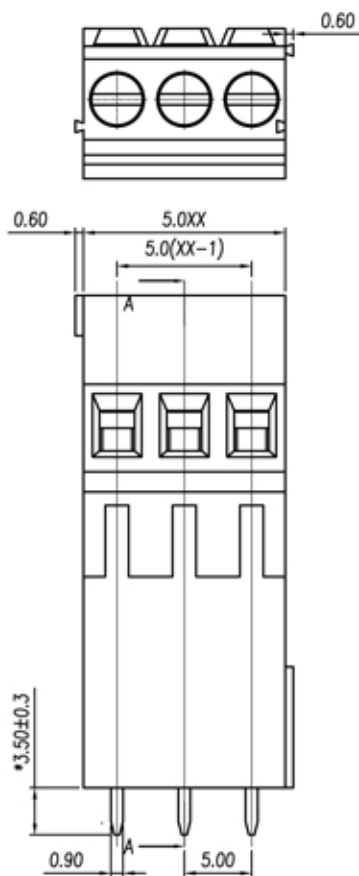
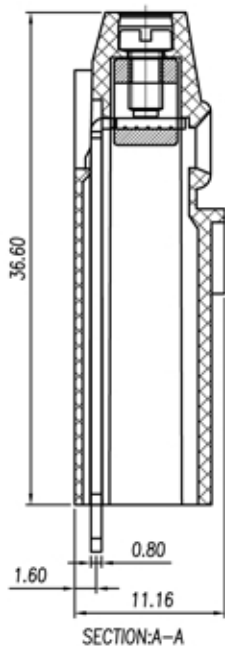


# euro-block

product specification

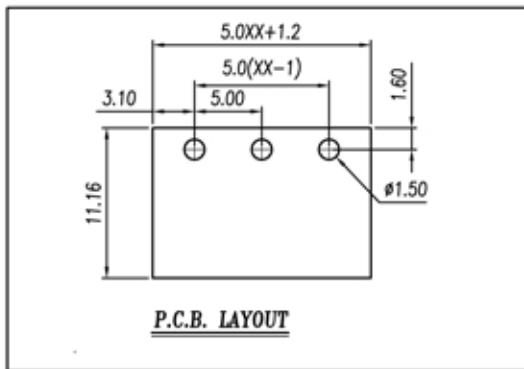

### Approvals

UL-cUL not approved  
VDE not approved

### Electrical

**Standard**  
**Rated voltage** 250V  
**Rated current** 18A  
**Contact resistance** 20mΩ  
**Insulation resistance** 500MΩ/DC500V  
**Withstanding voltage** AC 2000V/1 min  
**Wire range** 30-12 AWG 2.5 sqmm

**Torque** 0,4 Nm (3.6 Lb.in)  
**Temp. Range** -40°C + 105°C  
**Stripping length** 6-7 mm  
**Max sold. time** +250°C for 5 sec.

### Dimensions

**Pitch** 5 mm  
**Poles** 2 ÷ 24

### Material

**Housing** PA 66 UL 94V0  
**Pin** Brass, tin plated  
**Cage** Brass, Ni plated  
**Screws** Steek Zn plated  
**Slide Block**  
**Nut screw**  
**Clamp**

Versione/Version Data/Date

2014/1

13/06/14

General description of ordering code

Series	n. poles	pitch	version	color	custom
MHT52	2-24	5	V		

UNITS:mm SIZE:A4

ELDECO SRL - TORINO (ITALY)

Series:

MHT52-5-V