



P.C.B. LAYOUT

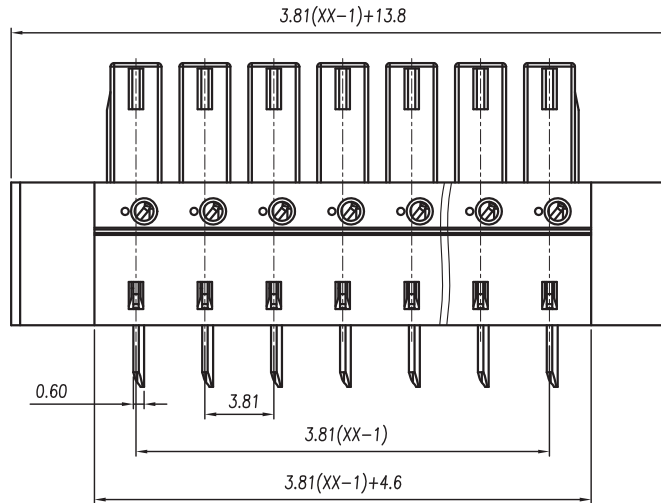

Approvals

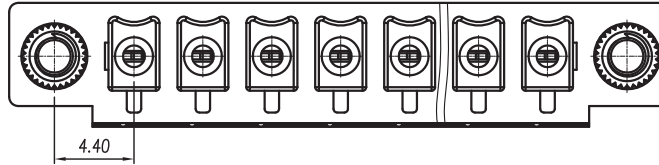

8A-300V
not approved

Electrical

Rated voltage 250V
Rated current 10A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC2000V/1 min
Wire range

Torque
Temp. Range -40°C+105°C
Stripping length
Max sold. time +250°C for 5 sec

Dimensions

Pitch 3,81 mm
Poles 2÷24

Material

Housing PA66 UL94V0
Pin Copper Alloy, tin plated
Cage
Screws
Side Block
Nut screw M2,5 Brass
Clamp

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CMA	02÷24	-3.81	-F		

Version Date

17/01 17/05/17



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CMA-3.81-F