



第一线位置



### Approvals

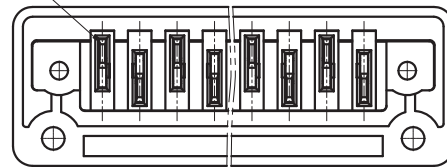

not approved



not approved

### Electrical

Rated voltage	250V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/ 1Min
Wire range	

Torque	
Temp. Range	-40°C + 105°C
Stripping length	
Max sold. time	+250°C for 5 sec

### Dimensions

Pitch	3.81 mm
Poles	2÷24

### Material

Housing	PA66 UL94V0
Pin	Brass, tin plated
Cage	
Screws	
Side Block	
Nut screw	M2.5, brass
Clamp	

### General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CMK	02÷24	-3.81			

### Version Date

17/01	31/01/17
-------	----------



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CMK-3.81