


euro-block

product specification

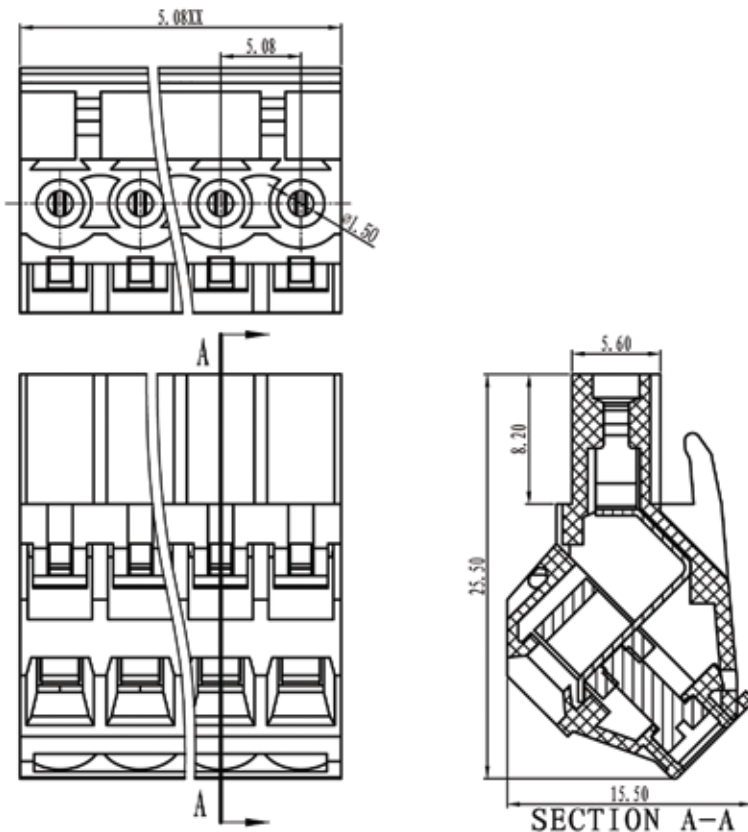

Electrical

Standard: UL-IEC
 Rated voltage: 250V-320V
 Rated current: 10A-20A
 Contact resistance: 20m Ω
 Wire range: 24-12AWG 2.5mm²
 Withstanding voltage: AC2000V/1Min
 Insulation resistance: 5000M Ω/DC1000V

Mechanical

Temp.Range: -40°C~+105°C
 Torque: 0.4Nm (3.5Lb'In)
 Strip length: 7mm


Dimensions

Pitch: 5.08mm
 Poles: xxp

Material

Housing: PA66, UL94V-0
 Screws: M2.5, steel Zinc plated
 Wire guard: Brass, Ni plated
 Clamp: Phosphor bronze, Ni plated

Schema generale del codice di ordinazione / General description of ordering code



TOLERANCES EXCEPT AS NOTED

| | linear dimension | | | | | fillet | chamfer | short angle sid | | | | ≡ | - | □ | // | ⊥ | |
|----------------|------------------|------|------|------|------|--------|---------|-----------------|----|-----|-----|-----|-----|-------|------|------|-----|
| | to | over | over | over | over | all | to | to | to | to | to | to | to | to | to | to | |
| variable range | 6 | 30 | 120 | 480 | | all | 6 | 10 | 50 | 120 | all | 5 | 30 | 120 | | | |
| tolerance | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.9 | ±0.2 | ±0.5 | ±1 | 1' | 30' | 20' | 10' | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 |

| | | | | | | |
|-------|----|------|----|-------|------------------------|----------|
| UNITS | mm | SIZE | A4 | SCALE | FIRST ANGLE PROJECTION | |
| | | | | | | |
| | | | | | NAME | CRI-5.08 |