




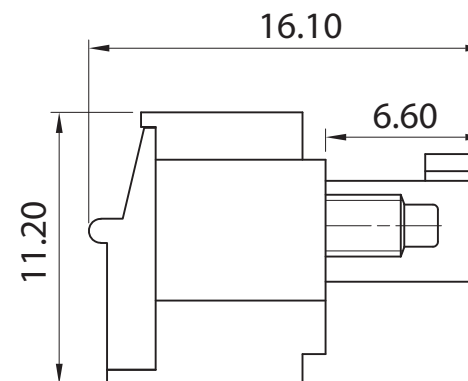

Approvals

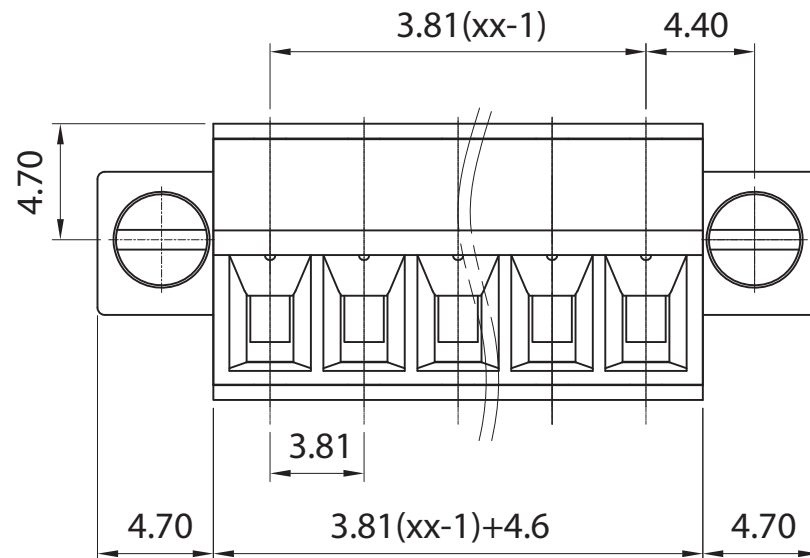

8A-300V

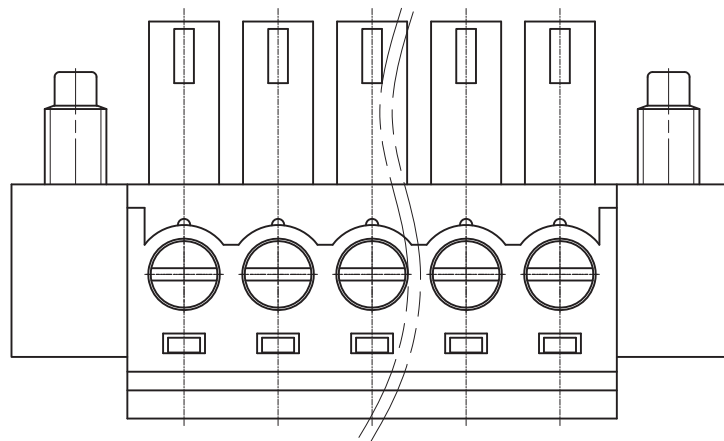

7A-250V

Electrical

Rated voltage	250V
Rated current	7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1min
Wire range	28-16 AWG 1mm ²

Torque	0,2Nm (1.8Lb in)
Temp. Range	-40°C +105°C
Stripping lenght	7 mm
Max sold. time	

Dimensions

Pitch	3,81 mm
Poles	2÷22

Material

Housing	PA66 UL94V0
Pin	
Cage	Copper Alloy, Ni plated
Screws	M2 steel, Zn plated
Side Block	
Nut screw	
Clamp	Phosphore bronze, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRF	02÷22	-3.81	-F		

Version Date

01/21

09/11/2021



euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

—	∕	⊥
to 10	over 10 to 100	over 100 to
0.10	0.30	0.60

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

CRF-3.81-F