



p.c.b. layout

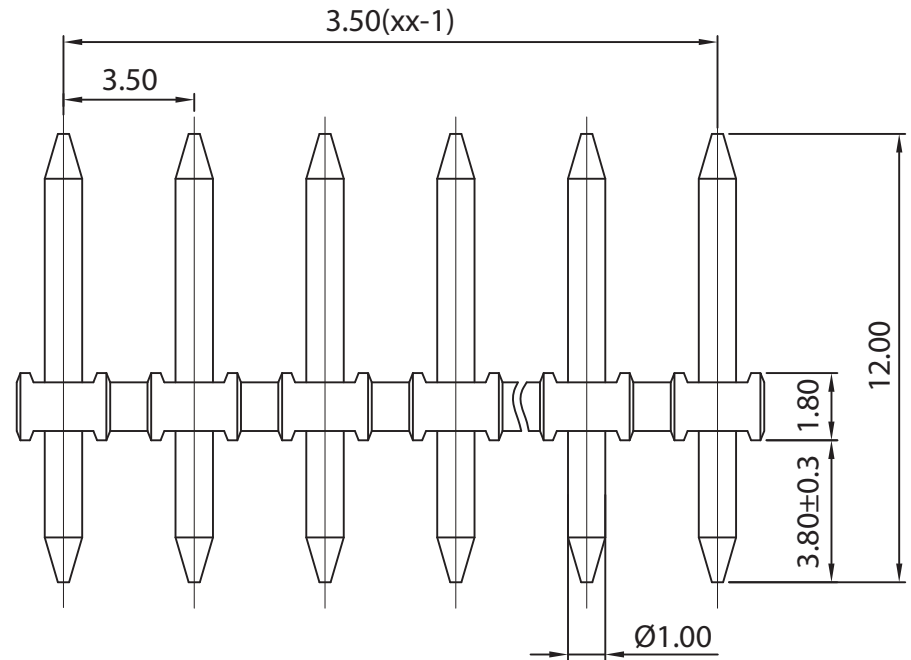

Approvals

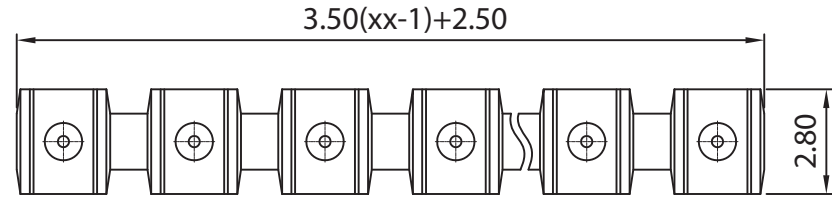

not approved  
not approved

Electrical

Rated voltage	250V
Rated current	8A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	
Torque	
Temp. Range	-40°C + 120°C
Stripping length	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	3,5 mm
Poles	2÷24

Material

Housing	PBT UL94 V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CLM	02÷24	-3.5			

Version	Date
01/21	28/09/2021



euro-block




UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5



CLM-3.5