

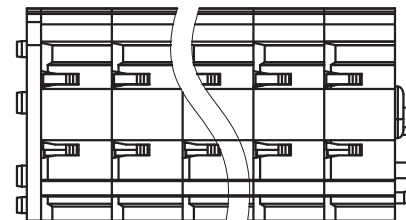


p.c.b. layout

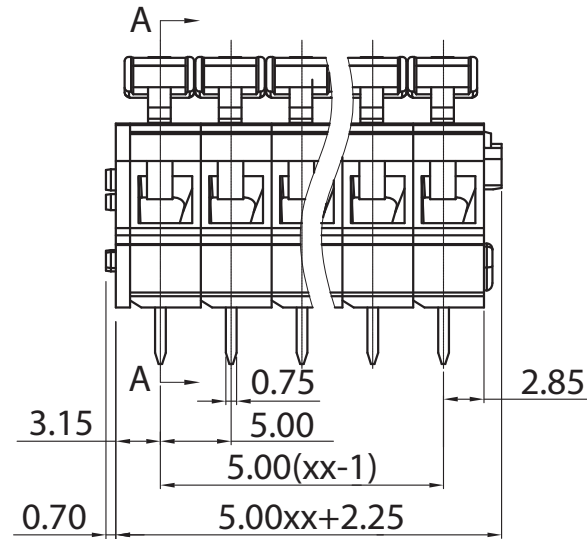

Approvals

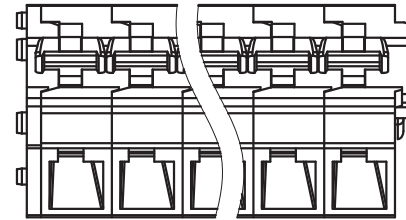

15A - 300V

Electrical

Rated voltage IEC 300V
 Rated current IEC 15A
 Contact resistance 20mΩ
 Insulation resistance 500MΩ/DC500V
 Withstanding voltage AC2000V/1min
 Wire range 28-14 AWG 2,5mm²

Torque 1,2Nm (10.6Lb in)
 Temp. Range -40°C +105°C
 Stripping length 5 mm
 Max sold. time +250°C for 5 sec

Dimensions

Pitch 5 mm
 Poles 2÷24

Material

Housing PA66 UL94V0
 Pin Copper Alloy, Sn plated
 Cage
 Screws
 Side Block
 Nut screw
 Clamp Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MRM5	0÷24	-5	-P		

Version Date

01/26



euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

MRM5-5-P