

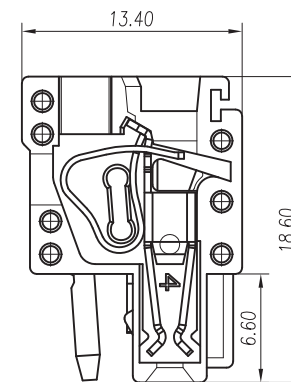
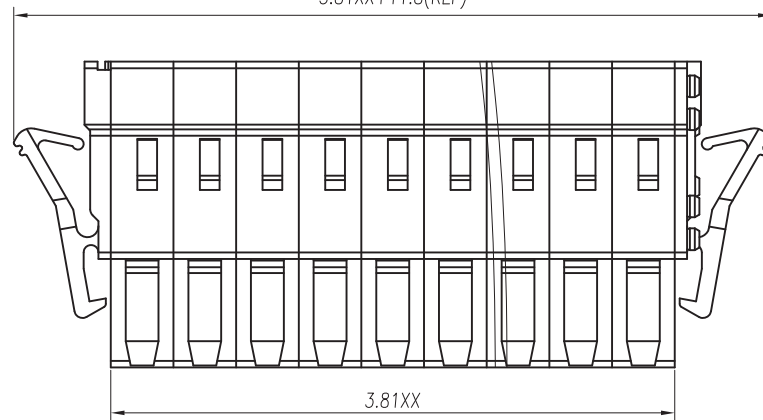


3.81XX+11.8(REF)



3.81XX

3.81

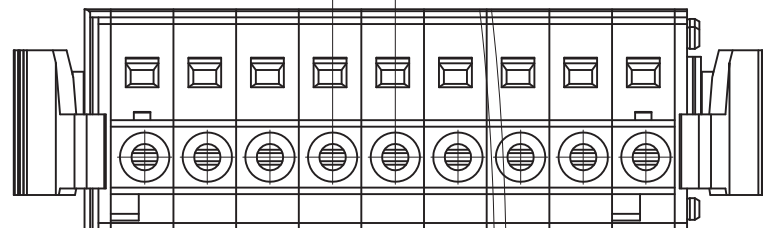

### Approvals



10A-300V



### Electrical

Rated voltage 130V  
 Rated current 10A  
 Contact resistance 20mΩ  
 Insulation resistance 500MΩ/DC500V  
 Withstanding voltage AC200V/1 min  
 Wire range 28-14AWG 1,5mm<sup>2</sup>

Torque  
 Temp. Range -40°C+105°C  
 Stripping length 8 mm  
 Max sold. time

### Dimensions

Pitch 3,81mm  
 Poles 2÷24

### Material

Housing PA66 UL94V0  
 Pin Copper Alloy, tin plated  
 Cage  
 Screws  
 Side Block  
 Nut screw  
 Clamp Stainless Steel

### General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP1	02÷24	-3.81	-EJ		

### Version Date

01/17 20/04/17



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CFP1-3.81-EJ**