

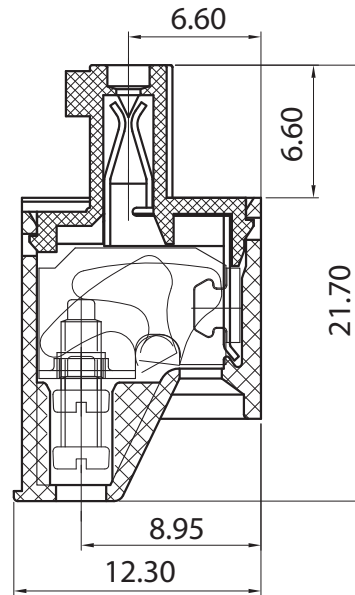


$$3.81(xx-1)+4.6$$



### Approvals

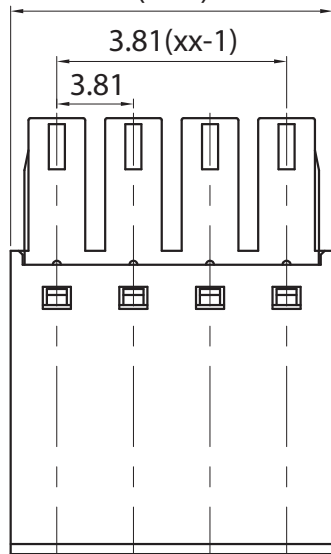

8A-300V



not approved

### Electrical

Rated voltage	250 V
Rated current	13.5 A
Contact resistance	20Ω
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	1mm2 28÷16 AWG

Torque	0,2Nm (1,8 Lb in)
Temp. Range	-40°C + 105°C
Stripping length	7 mm
Max sold. time	---

### Dimensions

Pitch	3.81mm
Poles	2÷24

### Material

Housing	PA66 UL94V0
Pin	---
Cage	Brass, Zn plated
Screws	M2, Steel, Zn plated
Side Block	---
Nut screw	---
Clamp	Phosphore bronze, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFF	2÷22	-3.81			

Version Date

01/21

28/09/2021



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 3:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CFF-3.81**