

Approvals



Electrical

Rated voltage	300V
Rated current	15A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1min
Wire range	28-12 AWG 2,5mm ²

Torque	
Temp. Range	-40°C +105°C
Stripping length	5 mm
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	5 mm
Poles	2÷24

Material


Housing	PA66 UL94V0
Pin	Copper Alloy, Sn plated
Cage	Stainless steel
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code



Series	n. Poles	Pitch	Version	Color	Custom
MRM6	2÷24	-5	-V		

Version Date

19/01 09/10/19

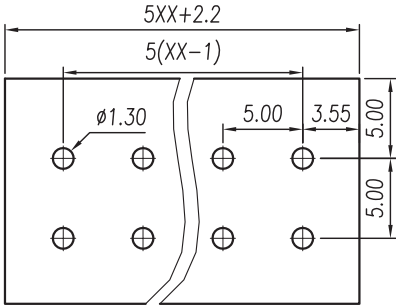


p.c.b. layout

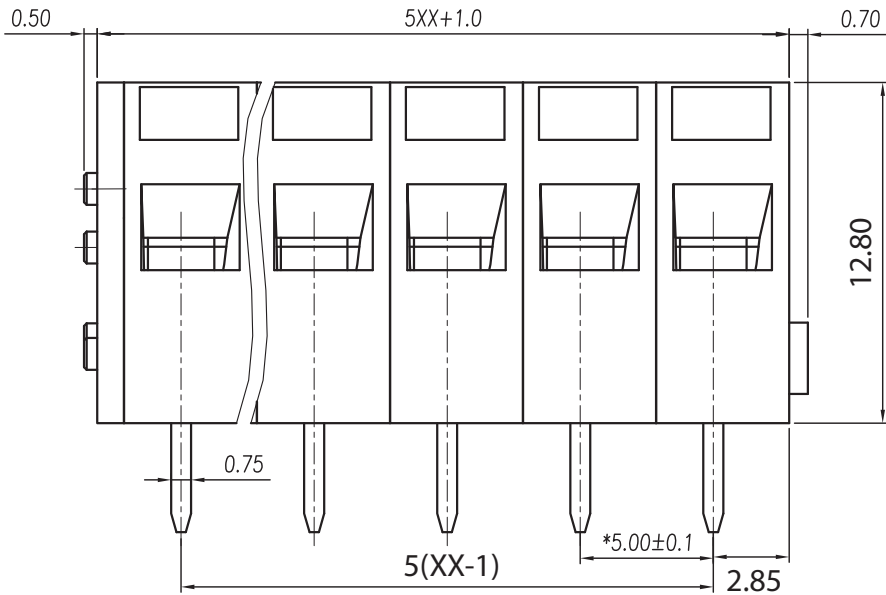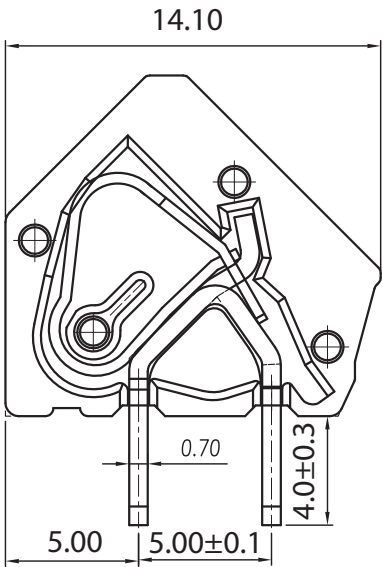

euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)										UNITS: mm			
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to	SCALE: 10:1		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	SHEET SIZE: ISO A4		



MRM6-5-V